


# Commercial/Industrial COLOR CHART

## SIGNATURE® 200 Standard Colors SILICONIZED POLYESTER

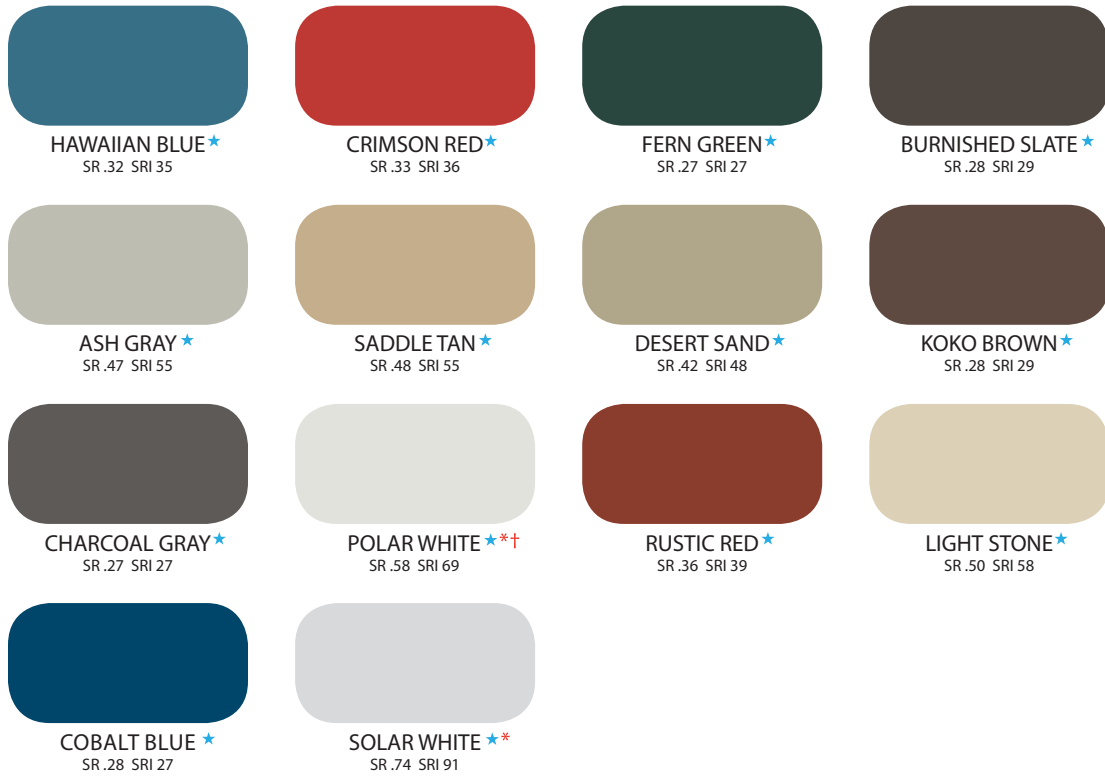

- Final color selection should be made from actual color chips.
- See product selection chart for gauge and color availability.
- All products available in smooth or embossed finish.
- Trim available in all colors.
- All Signature® 300 are low gloss colors.
- A 25-year limited paint warranty available for all colors upon written request. (Outside the continental United States, please inquire.)

## SIGNATURE® 300 Premium Colors 70% PVDF RESIN

Additional costs apply for Signature® 300 finishes.



- Signature® is a registered trademark of NCI Group, Inc.
- ★ ENERGY STAR Qualified Color through our Energy Star partners MBCI.
- \* Availability in certain areas may be restricted or require a surcharge.
- † Polar White is a Straight Polyester.

# Commercial/Industrial Panel Profiles

## What is Solar Reflectivity (SR)?

Solar reflectivity or reflectance (SR) is the ability of a material to reflect solar energy from its surface back into the atmosphere. The SR value is a number from 0 to 1.0. A value of 0 indicates that the material absorbs all solar energy and a value of 1.0 indicates it is all reflected. Energy Star requires SR testing of both new and aged roof products. New products must have an SR value of 0.25 or higher for steep slope (above 2:12) roofing and an SR value of 0.65 or higher for low slope (2:12 or less) roofing. Aged testing takes 3 years to complete, so not all products that meet the initial requirements are qualified. For more information, please go to [www.energystar.gov](http://www.energystar.gov).

## What is Solar Reflectivity Index (SRI)?

The SRI is used to determine compliance with LEED requirements and is calculated according to ASTM E 1980 using values for reflectance and emissivity. Emissivity is a material's ability to release absorbed energy. To meet LEED requirements, a roofing material must have an SRI of 29 or higher for steep slope (above 2:12) roofing and an SRI value of 78 or higher for low slope (2:12 or less) roofing. For more information, please go to [www.usgbc.org](http://www.usgbc.org).



### SIGNATURE® 200 - SILICONIZED POLYESTER

	SR #	SRI #
HAWAIIAN BLUE	.32	35
CRIMSON RED	.33	36
FERN GREEN	.27	27
BURNISHED SLATE	.28	29
ASH GRAY	.47	55
SADDLE TAN	.48	55
DESERT SAND	.42	48
KOKO BROWN	.28	29
CHARCOAL GRAY	.27	27
POLAR WHITE	.58	69
RUSTIC RED	.36	39
LIGHT STONE	.50	58
COBALT BLUE	.28	27
SOLAR WHITE	.74	91

### SIGNATURE® 300 - 70% PVDF RESIN

	SR #	SRI #
MEDIUM BRONZE	.33	36
SNOW WHITE	.65	78
SLATE GRAY	.37	41
ALMOND	.63	75
CLASSIC GREEN	.27	27
BROWNSTONE	.47	54
BRITE RED	.49	56
HARBOR BLUE	.28	27
BONE WHITE	.70	85

Profile	Panel	29 GAUGE		26 GAUGE			24 GAUGE			22 GAUGE		
		Galvalume Plus®	Sig® 200 (Liner Only)	Galvalume Plus®	Sig® 200	Sig® 300	Galvalume Plus®	Sig® 200	Sig® 300	Galvalume Plus®	Sig® 200	Sig® 300
<p>"PBR" PANEL</p>	PBR	●	■	●	●	■	●	■	■	■	■	■
<p>"PBU" PANEL</p>	PBU	●	■	●	●	■	●	■	■	■	■	■
<p>"PBC" PANEL</p>	PBC	●	■	●	●	■	●	■		■	■	
<p>"PBD" PANEL</p>	PBD	●	■	●	●	■	●	■		■	■	
<p>"AVP" PANEL</p>	AVP	●	■	●	●	■	●	■	■	■	■	■

● Available in any quantity, no minimum required.

■ May require minimum quantity